




OPENING SIMULTANEOUS KIT

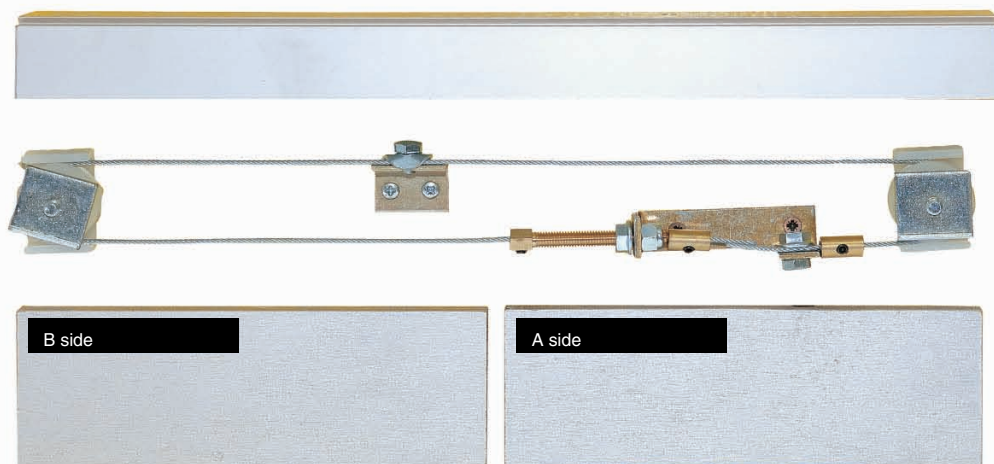


OPENING SIMULTANEOUS KIT COMPOSED BY:

- 1 ADJUSTABLE BRACKET COUPLING
- 1 TENSION ROD TO STRETCH THE CABLE
- 1 FIXED BRACKET COUPLING, PORT-CABLE PULLEYS
- 1 STEEL CABLE LOOM (8 MT)

ACCESSORIES TO COMBINE WITH THE ALUMINIUM PROFILES SLIDING SYSTEM

● **COD. 3030002006**

OPENING SIMULTANEOUS KIT

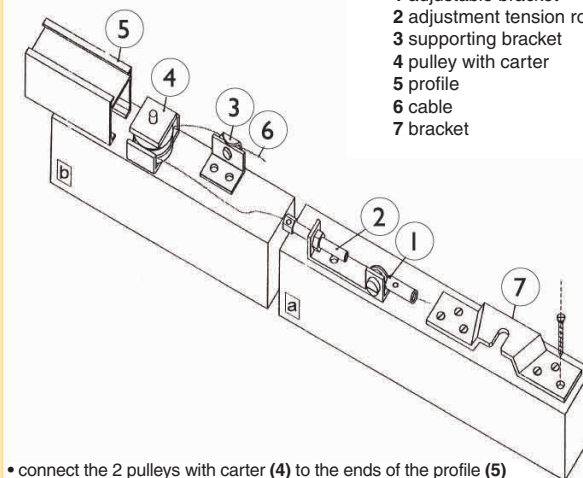

- 1 adjustable bracket
- 2 adjustment tension rod
- 3 supporting bracket
- 4 pulley with carter
- 5 profile
- 6 cable
- 7 bracket

- connect the 2 pulleys with carter (4) to the ends of the profile (5)
- fix the bracket/tension rod (1/2) on the A side
- fix the cable (6) to the adjustable bracket (1)
- pass the cable (6) inside the carter and around the pulley (4)
- put the end part of the cable (6) inside the tension rod (2), then block the hexagonal head bolt
- begin the registration of the mechanism until you obtain the desired damper
- fix the supporting bracket (3) on the B side
- finally, block the cable into the supporting bracket (3)

MÜLLER FISSAGGIO s.a.s.

Via delle Robinie, 31 - Zona Industriale - 06083 BASTIA UMBRA - (PG/ITALY) - Tel. 075.8004059 - 075.8010841 - Fax 075.8010846 - 075.8014035

www.mullerfissaggio.com - muller@mullerfissaggio.com